


GLORY FILM
韦拉克预涂膜

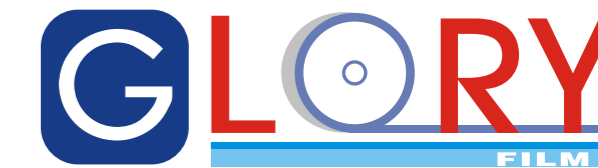

温州韦拉克包装材料有限公司
WENZHOU GLORY PACKAGING MATERIALS CO.,LTD.


地址：温州市瓯海区仙岩工业区翔凤路169号一楼
ADD: No 169 xiangfeng Road 1 floor xianyan industry zone Ouhai Wenzhou
TEL: 0577-85315688
FAX: 0577-85317688
WWW.glorybopp.com
E-mail: info@glorybopp.com

联系人：李秋 13738307138
E-mail: info@newstar-machine.com

EGYPT OFFICE:
Arabian Trade company


FACTORY ADDRESS:
Add: 16,Rabi Abd El-Aziz st.,from Alarbeen st.,Hadekt Badr Gesr
Elsuze st.,Cairo-Egypt
Tel & Fax: +202-22440921
Mob: +20 1274849735 - +20 1282351764
E-mail: info@glorybopp.com
WWW.arabiantrades.com

科技创新 品质卓越
Scientific and technological
innovation excellent quality

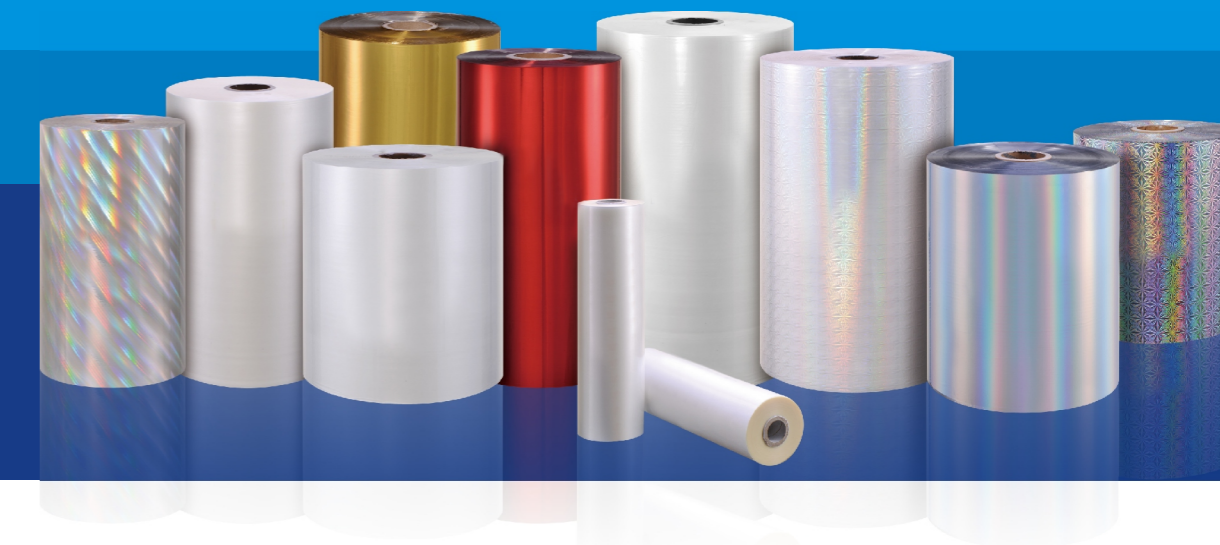

温州韦拉克包装材料有限公司
WENZHOU GLORY PACKAGING MATERIALS CO.,LTD.

千彩承制 · 18858823143



GLORY FILM
韦拉克预涂膜

科技创新 品质卓越

Scientific and technological
innovation excellent quality



企业概述


Company overview

温州韦拉克包装材料有限公司是国内优秀复合型预涂膜生产研发厂家，多年来我们不断努力改进产品，优化产品性能，制造多元化复合材料产品。公司主营产品BOPP预涂膜、PET预涂膜、数码印刷预涂膜，广告喷绘热裱膜，PET地暖复合材料，产品应用于包装印刷覆膜、办公用品覆膜，广告热裱覆膜、建筑复合材料、光学复合材料等领域。公司已通过ISO9001:2008质量管理体系认证、绿色印刷环保标志认证、国家高新技术企业认证；EVA型预涂膜行业标准制定单位等荣誉。

我们拥有一支优秀的研发团队，专业知识和技术经验丰富，能为产品的质量提供强而有力的技术支撑。感恩，价值，共进，分享是我们的理念，“双赢”是我们的经营方针，我们将进一步完善企业质量管理体系，为客户提供更优质的产品和服务。

Wenzhou GLORY PACKAGING Materials Co., Ltd. is excellent composite laminating film production and development of the manufacturers, over the years we constantly strive to improve our products, optimize product performance, diversified manufacturing composite products. The company's main products BOPP laminating film, PET laminating film laminating film digital printing, advertising inkjet heat-mounted film, PET warm composite film products used in packaging and printing, office supplies film, advertising film heat-mounted, building composite materials, composite materials and other optical field. The company has passed ISO9001: 2008 quality management system certification, certification of green printing green flag, the national high-tech enterprises; EVA type laminating film industry standards units honor.

We have an excellent R & D team, professional knowledge and technical experience, can provide strong technical support for the quality of the product. Thanksgiving, value, together, share our philosophy, "win-win" is our operating principles, we will further improve the quality of enterprise management system, providing customers with better products and services.



GLORY FILM
韦拉克预涂膜

科技创新 品质卓越
Scientific and technological
innovation excellent quality



主要产品系列
Main Products Series



- ★ BOPP 预涂膜
BOPP Thermal Lamination Film
- ★ BOPP 激光镭射透明预涂膜
BOPP Hologram/Laser Thermal Lamination Film
- ★ PET 预涂膜
PET Colour (Silver & Golden) Metalized Themal Lamination Film
- ★ PET 镀铝、金色及彩色预涂膜
PET Colour (Silver & Golden) Metalized Thermal Lamination Film

- ★ BOPP 无缝素面光柱镭射激光膜
BOPP Metallized Hologram Film
- ★ 触感预涂膜
Soft Touch (Velvet) Thermal Lamination Film
- ★ 抗磨哑光预涂膜
Anti Seratch Matt Thermal Lamina-tion Film

包装方式
Packaging



出口包装
Export packaging



内销包装
Domstic packaging

BOPP 预涂膜 (光膜和哑膜)
BOPP Thermal Lamination Film (Gloss & Matt)



★ **环保安全**
Environmentally friendly

本产品无毒、无味、无苯，覆膜过程中不产生任何污染气体和物质，彻底根除了易燃溶剂的使用和储存所产生的火灾隐患。

It is environmentally friendly, non-hazardous to health and safe to use as no toxic gases or volatile content is emitted. Safe in laminating process as no solvent based adhesive is used.

★ **环保安全**
Environmentally friendly

大幅度提升印刷品色彩饱和度和光亮度，粘接力强，吃粉能力强，有效防止了印刷品在模切，凹凸后起泡和脱膜，哑光预涂膜还能适应覆膜后的局部UV上光、烫印、网印、磨砂等工艺。

Compared with other solvent lamination, our film is better in clarity and bonding. Strong ability of absorbing powder. It prevents lamination from being pressed, bubbled and shredded off easily. Matt thermal lamination film is good for spot UV and hot stamping.

★ **操作简单**
Easy handling

只需热辊温度符合要求，即可随时覆膜，无需专业技巧。


It is easy to operate once the required temperature is met and no special technique required.

★ **高效节能**
Efficient and energy-saving

覆膜时省掉了调胶、上胶、加热、烘干等程序，提高效率，降低成本。

Production cost is reduced substantially as there is no film wastage, mixture of adhesive solvent, and no UV heating lamp is required.

BOPP 激光镭射透明预涂膜
BOPP Hologram/Laser Thermal Lamination Film

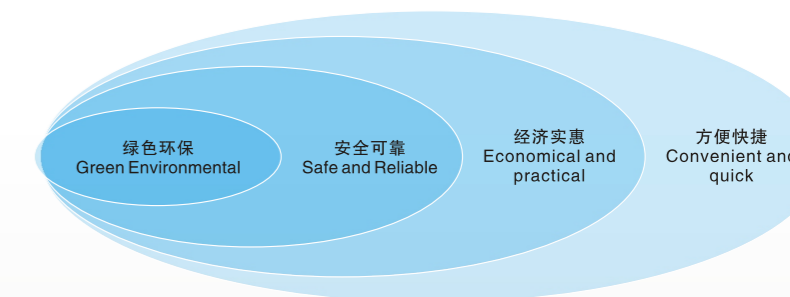

主要用于酒盒、工艺品、化妆品、礼品等行业的包装覆膜，利用干式覆膜机和纸张复合。透明膜有直接覆膜和介质后复合，镀介质的好处就是，膜面复合后遇到水，汗水湿气，不会立刻失去镭射效果。

Mainly used for wine, handicrafts, cosmetics, gifts and other industries packaging film. The use of dry laminating machine and paper composite. Transparent film is directly coated and plated composite plating medium, the advantage of medium are laminating films meets water, perspiration moisture, not immediately lose laser effect.

厚度: 20um, 20-26um

宽度: 100mm-1800mm

材质: BOPP薄膜 EVA热熔胶

特点: 色泽亮丽、透明，不会遮盖印刷图案。

用途: 用于包装的印刷前后覆膜。

1、与铜板、白卡、白板纸复合印刷、铁皮复合等，镭射效果好。

2、上百种图案供选择，也可定做专版！具有一定的防伪特点。

3、适合于手提袋、包装纸、礼品盒等贴合，软性包装、可印刷。

4、适用于高档药盒、酒盒、礼品盒、书、杂志、纸盒等纸制品复膜。

5、适用于高档防伪纸盒复膜。

Thickness: 20um, 20-26um

Width: 100mm-1800mm

Material: BOPP film and EVA Glue

Characteristics: Bright color, transparent. Does not cover printing designs.

Usage: used for laminating, before and after paper printing.

1、Coating on copper, white, white board paper composite printing, metal composite, laser effect.

2、Hundreds of designs to choose. Can be customized special edition! they have the security features.

3、Suitable for hand off the bag, wrapping paper, gift boxes and other joint, flexible packaging and printing.

4、Suitable for high-grade box, wine box, gift box, book, magazine, paper box, paper products of film.

5、Suitable for high-grade imitation pseudo carton film.

一英寸纸芯预涂膜

1 inch core Thermal Lamination Film

特点: 方便、灵活、快速、适合于少量印刷品等纸制品的覆膜，广泛应用于小型印刷厂、快印店、设计公司及其他非印刷行业的企业，如影楼、公司、工厂、学习等。

品种: BOPP亮光、哑光预涂膜PET预涂膜。

厚度: BOPP薄膜 EVA热熔胶

特点: 17-35um 宽度: 200-650mm 长度: 200m、300m

纸芯内径: 1英寸


Features: Convenient,flexible,fast and suitable for a small amount of printed materials such as paper products coated,widely used in small printing plant,quick printing shop,design companies and other printing companies,such as studio,company,factory,learning,and so on.

Varieties: BOPP gloss,matt,PET,Thermal Lamination Film.

Thickness: 17-35 micron **Width:** 200-650mm **Length:** 200m,300m

Characteristics: Bright color,transparent.Does not cover printing designs.

The paper core diameter: 1 inch

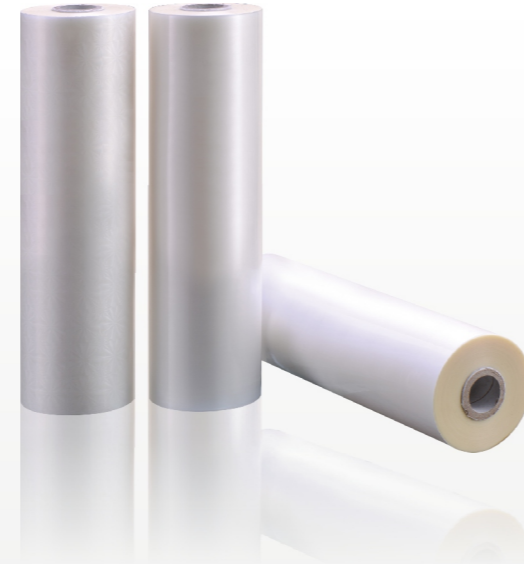

PET 预涂膜

PET Thermal Lamination Film

厚度: 16um、22um、30um、75um、100um、125um

宽度: 100mm-1880mm

长度: 200m-3000m

纸管: 1英寸/3英寸

特点: 亮度高，表面耐磨性好、挺度好、粘合力强，适应覆膜后的表面UV油上光、网印等。

Thickness: 16micron、22micron、30micron、75micron、100micron、125micron

Width: 100mm-1880mm

Length: 200m-3000m

Paper Core: 1 inch/3 inch

Characteristic: High clarity,wearable on surface,good stiffness,Strong bonding.The film surface is suitable for spot UV and screen printing after laminating.



PET镀铝/金色及彩色预涂膜

PET Colour (Silver & Golden) Metallized Thermal Lamination Film

厚度: 20um-23um

宽度: 100mm-1600mm

长度: 200m-3000m

纸管: 1英寸/3英寸

特点: 本产品覆到纸张上能达到金银卡纸的效果，广泛应用于食品、药、酒日用消费品等包装纸盒。

Thickness: 20-23micron

Width: 100mm-1600mm

Length: 200m-3000m

Paper Core: 1 inch/3 inch

Characteristic: This product has the same effect as the aluminum paper When it laminates on papers. It is used to laminate on the daily consum-able packing box,such as the box of grocery, medicine,wine,etc.



BOPP 无缝素面光柱镭射激光膜

BOPP Metallized Hologram Film

厚度: 18um

宽度: 100mm-1200mm

长度: 200m-5000m

纸管: 1英寸/3英寸

特点: 本产品覆到纸张上能达到金银卡纸的效果，广泛应用于食品、药、酒日用消费品等包装纸盒。


Thickness: 18micron

Width: 100mm-1200mm

Length: 200m-5000m

Paper Core: 1 inch/3 inch

Characteristic: This product has the same effect as the aluminum paper When it laminates on papers. It is used to laminate on the daily consum-able packing box,such as the box of grocery, medicine,wine,etc.

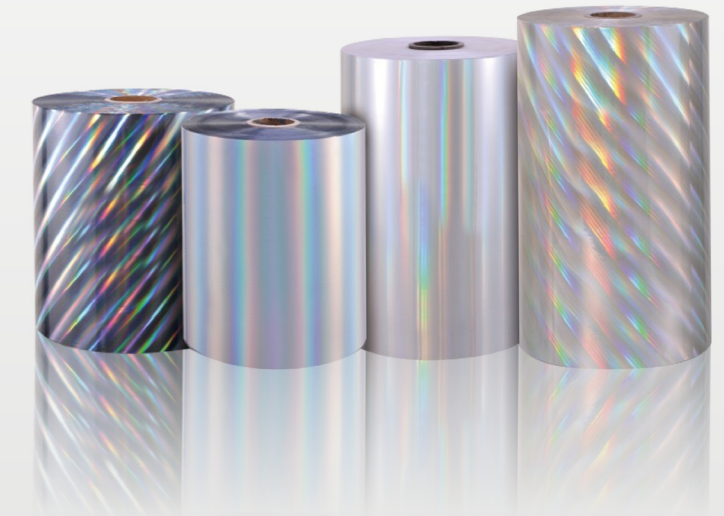

触感预涂膜

Soft Touch (Velvet) Thermal Lamination Film

厚度: 35um
宽度: 100mm-1350mm
长度: 200m-2000m
纸管: 1英寸/3英寸
特点: 表面有丝绒光滑、细腻的特殊触感。

Thickness: 35micron
Width: 100mm-1350mm
Length: 200m-3000m
Paper Core: 1 inch/3 inch
Characteristic: Special touch feeling on the surface as smooth as silk.

适用机器: 干式覆膜机
温度: 90-95℃
压力: 15Mpa
速度: 20-50mm

Suitable Equipment: Dry laminator
Temperature: 90-95℃
Pressure: 15Mpa
Speed: 20-50mm



抗磨哑光预涂膜

Thermal Lamination Film

厚度: 35um
宽度: 100mm-1350mm
长度: 200m-2000m
纸管: 1英寸/3英寸
特点: 表面耐磨、不易刮花

Thickness: 35micron
Width: 100mm-1350mm
Length: 200m-2000m
Paper Core: 1 inch/3 inch
Characteristic: Anti Scrath on the surface,Being not easy to scratch.

适用机器: 干式覆膜机
温度: 90-95℃
压力: 15Mpa
速度: 20-50mm

Suitable Equipment: Dry laminator
Temperature: 90-95℃
Pressure: 15Mpa
Speed: 20-50mm



GLORY FILM

韦拉克预涂膜

您的覆膜材料专家

YOUR MATERIAL OF EXPERTS

使用参数 Using parameters

覆膜设备: 干式、湿式覆膜机
热辊温度: 一般印刷品: 85-100℃ 特殊印刷品: 100-110℃
压力: 8-15Mpa
速度: 8-20m/min
备注: 特殊印刷品是指油墨层厚、色泽深、水份重、纸张定量大的印刷品。

使用指引 Use gudelines

- 1: 请根据不同纸张及油墨情况调整压辊压力和热辊温度。
- 2: 如果第一次使用本产品, 或更改印刷材料、工艺条件等, 建议先做小批量试验, 再决定大批量使用。
- 3: 下列情况, 有可能影响覆膜效果:
 - a. 使用金属油墨。
 - b. 油墨中含有过量的石蜡、干燥油、去粘剂、硅类添加剂等。
 - c. 油墨层过厚。
 - d. 油墨未完全干透。
 - e. 纸张湿度大。
 - f. 喷粉过量。

Laminating device: Dry,wet laminating machine
Hot rolls temperature: General print: 85-100 degrees Celsius
Special printing: 100-110 degrees Celsius
Compression: 8-20Mpa
Degree: 8-20m speed/min
Note: For special printing ink layer thickness,refers to the color depth,water paper quantitatively big print.

- 1: Please according to different paper and ink roller pressure and adjust hot rolls temperature.
- 2: If the first use of this product,or change the printing material and technical conditions, suggest to do small batch test,then decided to mass.
- 3: The following conditions may affect,coated effect:
 - A.use metal ink
 - B.ink contains excess wax,drying oil,adhesive,silicne additive type
 - C.ink layer too thick
 - D.ink not completely dry
 - E.paper humidity is high
 - F.powder spraying overdose

产品规格及参数 Specification & Parameter

规格	Specification		GF-14 亮光 Gloss	GF-17 亮光 Gloss	GF-19 亮光 Gloss	GF-20 亮光 Gloss	GF-25 亮光 Gloss	GF-16 哑光 Matt	GF-17 哑光 Matt	GF-19 哑光 Matt	GF-20 哑光 Matt	GF-25 哑光 Matt
		总计 Toatl	14	17	19	20	25	16	17	19	20	25
厚度	Thickness (um)	基材 Bsae	10	12	12	15	15	12	12	12	15	15
		胶层 Eva	4	5	7	5	10	4	5	7	5	10
宽度	Width (mm)	360 390 440 540 590 780 880 1080 1320 1400 1600 1880 (或根据要求提供特殊宽度和厚度/or as customers' request)										
长度	Length (mm)	200-3600m										
纸芯内径	Paper Core	25.4mm(1 inch) 58mm(2.25 inch) 76mm(3 inch)										
接口	Bonding	≤2										

广泛应用
为生活创造无限可能

Widely used in the
To create infinite possibility for life



应用设备
Application Machine

部份应用
Partial application

